

EXPLORING THE APPLICATION OF SILICA FUME AS AN ALTERNATIVE TO CEMENT IN CONCRETE MIXTURES**Manjeet**Assistant Professor on Contract, Civil Department, UIET MDU
Email-dgr.manjeet15@gmail.com**ABSTRACT**

Over the last three decades, there have been significant advancements in the development of concrete as a construction material, particularly in the realm of high-strength applications. One of the key materials at the forefront of this development is Silica Fume (SF), a pozzolanic admixture that has gained global attention for its ability to substantially enhance the properties of concrete when added in specific percentages. This study investigates the efficacy of SF as a partial replacement for cement in concrete formulations. In light of the continuous efforts to boost concrete's strength and durability, especially in environments prone to corrosion, the adoption of high-performance concrete is advocated for structures demanding enhanced strength and longevity. The integration of silica fume not only augments the mechanical properties of concrete but also its durability characteristics. For this research, concrete batches were mixed with different ratios of silica fume—5%, 10%, and 15% by aggregate volume. These specimens underwent rigorous testing to assess their compressive and flexural strength. The results revealed that an increase in silica fume content correlates with improvements in both compressive and flexural strength, highlighting silica fume's potential as a viable partial substitute for cement in concrete, thereby elevating its overall performance and quality..

Keyword-: Silica fume, concrete, industrial waste, pozzolanic. properties, compressive strength, flexural strength

1 INTRODUCTION

Leaving waste directly into the environment creates environmental problems. Therefore, emphasis has been placed on recycling of waste products from various industries. Wastes can be recycled or used as mixtures to maximize the use of natural resources and save environmental waste. Disposal of waste in nearby areas degrades the soil's fertility. Silica fume, a byproduct of silicon or ferrosilicon production, serves as a synthetic pozzolan. It originates from the reduction of quartz with coal in an electric furnace. It comprises carbon, sulfur, and oxides of various elements, including aluminum, iron, calcium, magnesium, sodium, and potassium. Unlike crystalline silica, silica fume (also known as microsilica) has an amorphous structure, meaning it lacks a crystalline form.

Microsilica is an ultrafine powder created as a byproduct of making silicon and ferrosilicon. Its exceptional fineness makes it 100 times smaller than cement particles, with an average thickness of just 0.1 micron (less than 1 micron). This remarkable fineness is attributed to its high concentration of amorphous silica (>90%), which imparts its unique properties.

Heating highly pure quartz releases silicon at temperatures around 2000°C, leaving behind silica particles. These particles react with oxygen at lower temperatures, forming amorphous silica particles. Recent advancements over the past three decades have enhanced the use of concrete in construction. Silica fume and fly ash are commonly used alone or together to create strong and reliable concrete structures. In recent years, silica fume has gained significant global interest as a pozzolanic additive in concrete. When used in appropriate amounts, silica fume enhances concrete's uniformity, strength, and hydraulic conductivity. By promoting cohesion in concrete mixtures, it helps prevent cracking and excess water loss (bleeding), especially in demanding conditions that require highly homogeneous mixtures.

Cement is an important raw material for concrete and relatively expensive materials and the use of river sand due to finely aggregated concrete causes natural degradation from the river Concrete in large quantities required for world-class infrastructure , convenient collections, and elegant collection It becomes an integrated whole. The resulting mixtures are cast in the shapes and sizes required to produce a structure capable of carrying the applied

load Silica fume is commonly used for high-strength concrete and copper slag for concrete- . the hardness and c Strength parameters of concrete were cast for Reinforced concrete has been developed to study the load deflection of concrete silica fume and copper slag of high quality. Increased cement production releases more CO₂ into the atmosphere. River sand was widely used as fine-grained concrete aggregate, as it undergoes degradation in river sand and affects groundwater levels. For these reasons, alternative materials for concrete should be explored. Silica fume is used as a proportion of 0%, 5% , 10%, and 15% cement in concrete. Silica fumes are a by-product of the manufacture of silicon metal or ferrosilicon alloys. It is used in high performance concrete due to its highly reactive pozzoloanic character. Concrete containing silica fume can have great strength and durability.

2. MATERIALS

Cement

Cement is a binder, a construction chemical that allows other materials to form, harden, and adhere together. Cement is rarely actually used, but is used to bind sand and gravel. Cement, in general, is composed of all types of adhesives, but, narrowly, binders used in architectural and civil engineering construction Portland cement is the main component of concrete. Portland cement and water is an aggregate that forms a strong concrete by combining sand and gravel. OPC 53 grade cement was used. Cement is a binder used in the manufacture of concrete. It binds coarse aggregate and fine aggregate into a single unit with the help of water and fills the micro voids in the concrete.

Table 1: Properties of ordinary Portland cement

Property	Value
Specific gravity	3.15
Initial setting time	47 min
Final setting time	205 min
Bulk density	4%



Fig. 1 Cement used

Fine Aggregate

River sand, crushed sandstone and gravel are the source of the rich collection. The sources of the crumbs are crushed rock or stone, and the natural breakdown of the stones. The curtains are higher. Surface lines are smaller than fine aggregate. Builders utilize river sand as a fine aggregate in construction. Sand is a natural material composed of particles in various dimensions. Its fineness determines its classification. This project specifically employs sand of the third grade. Fine aggregates for concrete typically involve particles that pass through a 4.75 mm IS-Sieve. Specific details regarding the sand used in this study are provided in Table 2 for reference.

Table 2: Properties of fine aggregate

Property	Value
Bulk density	1526 kg/m ³
% of voids ratio	36.21 %
Voids Ratio	0.61
Specific Gravity	2.56
Fineness modulus	2.85

**Fig. 2:** Fine aggregate**Coarse Aggregate**

Materials with a particle size more than 0.19 inches are considered coarse aggregate, which typically has a thickness ranging from 3/8 to 1.5 inches. Crushed stone and coarse rock are the two main types of coarse aggregate utilised in concrete. The coarse aggregate for the concrete is to be kept in a 4.75mm IS-Sieve. A collapsed rectangle with a local diameter of 20 mm is the basic material utilised in this experimental effort. Table 3 below details the coarse aggregate utilised for this test and its properties.

Table 3: Properties of coarse aggregate

S.NO	Property	Test Results
1	Specific Gravity	2.66
2	Water absorption (%)	0.91
3	Fineness Modulus	6.89

**Fig. 3:** Coarse Aggregate**Water**

Water serves as a binder for the aggregates when combined with cement; it is the primary component. The process by which water causes concrete to harden is known as hydration. The primary ingredients of cement react with molecules of water to produce a chemical or hydrophobic agent, making water a chemical reagent. Concrete cannot be made without water. It plays a key role in the cement chemical reaction. It is crucial to keep a close eye

on both the quantity and quality of water. For this experiment, we mixed the concrete and rinsed the sample using water that is suitable for use in a laboratory setting, specifically soft drinking water.

Silica Fume

Silica fume, a highly pozzolanic component utilised to improve the mechanical and durability of concrete, which is a by-product of ferrosilicon manufacturing. Either add the components separately to the concrete or combine them with the Portland cement and silica fume. Producing silicon metal or ferrosilicon alloys results in the emission of silica fumes. Its extremely reactive pozzolanic quality makes it ideal for usage in HPC. Extremely strong and long-lasting concrete is possible using silica fume. Table 4 lists the characteristics of silica fume. The concrete was created using five layers of replacement material, specifically aggregate by volume percentages of 5%, 10%, and 15%.



Fig. 4: Plastic waste

3. Experimental Plan

Samples of various concrete aggregates were cast and tested to determine different strengths. A 150mm × 150 mm × 150mm cube was constructed to determine the compressive strength of the concrete. A prismatic beam of dimensions 100 mm × 100 mm × 500 mm was shot to test the impact force. A reinforced concrete block with dimensions of 100mm × 200mm × 1200mm was cast to study the load-deflection behavior of the beam, where only good quality mixes are cast and the optimal mix is obtained from dynamic tension and strength which creates test results.



Fig. 5: Materials batching

Test Conducted

Tests were conducted on the concrete mix using a Universal Testing Machine (UTM). Tests were conducted to analyze compressive strength and impact strength. For each test, a standardized test procedure is followed and the performance of the concrete mix is studied. The tensile strength of the concrete cube at 7 years and the tensile strength at 28 days were evaluated using a tensile test at 2000 kN. Once the test sample is ready, force is steadily applied to it until it fails. The maximum force required to cause the sample's failure is recorded, and this value is used to determine the sample's shear strength.



Fig. 6: Compressive strength test

The tensile strength of concrete is indirectly evaluated using the Flexural Strength Test. An unreinforced concrete slab or beam's resistance to impact failure can be tested in this way. Parameters of fracture indicating MPa are the results of flexural tests on concrete. The specimens utilised were beams measuring 100 mm × 100 mm × 500 mm. After 7 and 28 days of curing, the specimens were left to dry in the open air. Then, they were tested for flexural strength using a flexural testing apparatus.

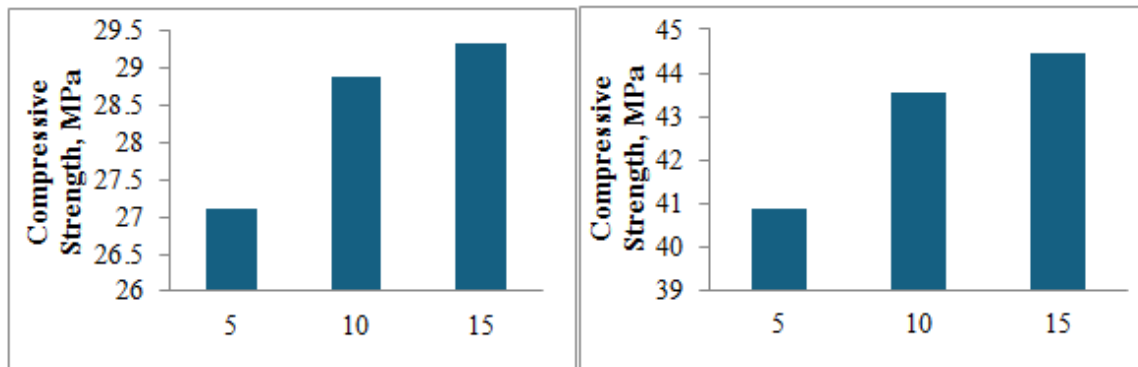


Fig. 7: Flexural strength test

4. RESULTS

4.1 Compressive strength test results

To determine the effect of adding different percentages of silica fume to concrete on its tensile strength, this study conducted experiments with concrete at 0%, 5%, 10%, and 15%. There was a 15% improvement in the tensile strength of concrete. Maximum compressive strengths of 29.33 MPa and 43.56 MPa, respectively, were recorded after 7 and 28 days. The findings highlight the significant potential of silica fume in concrete, suggesting its usage as a cement alternative.




(a) Compressive strength at 7 days (b) Compressive strength at 28 days

Fig. 8: Variation of compressive strength

Silica fume acts as a microfiller in concrete, increasing density and workability and reacts with calcium hydroxide to enhance interparticle bonding and acts as an additional ingredient in cement, increasing strength as a result with pozzolanic properties much finer than cement and the presence therefore more surface so greatly increases the stability, while the percentage of silica fume increases. Silica fume appears to have a significant effect on compressive strength. The increasing demand for building materials in the construction industry is increasing the importance of high-strength concrete.

4.2 Flexural strength test results

The present investigation examined the effect of adding different percentages of silica fume to concrete, ranging from 0% to 15%, in order to measure the increase in compressive strength of the material. Concrete showed a progressive improvement in flexural strength of up to 15%. After 7 days and 28 days, the maximum flexural strength was measured to be 4.448 MPa and 6.72 MPa, respectively. The findings highlight the significant potential of silica fume in concrete, suggesting its usage as a cement alternative.

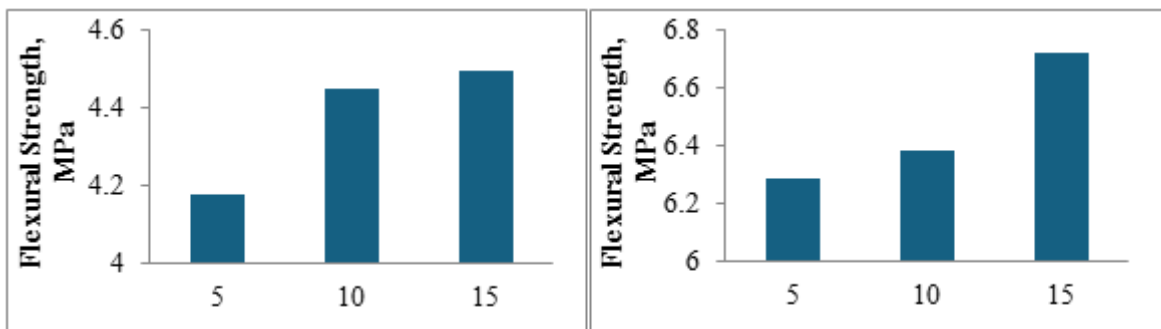

(a) Flexural strength at 7 days

(b) Flexural strength at 28 days

Fig. 9: Variation of flexural strength

Silica fume is very fine and rich in glassy silicon dioxide, making it an excellent material to improve concrete's properties. Portland cement releases calcium hydroxide during chemical reactions. A novel binder, calcium silicate hydrate, is formed when silica fume combines with calcium hydroxide. It is chemically very similar to calcium silicate hydrate treated with Portland cement. The new binder enhances the quality of silica-fume concrete and significantly boosts its pulse energy. The use of silica fume in concrete is not just to cut costs or replace cement; it is an essential part of the material.

5. CONCLUSION

Leaving waste directly into the environment creates environmental problems. Therefore, emphasis has been placed on recycling of waste products from various industries. Wastes can be recycled or used as mixtures to maximize the use of natural resources and save environmental waste. These industrial wastes on neighbouring land depletes the soil of its natural fertility and makes the area look unclean. As a synthetic pozzolanic combination, silica fume—also called microsilica or condensed silica fume—is utilised. This substance is made when silicon or ferrosilicon alloys are made by reducing quartz with coal in an electric furnace. For the sake of this investigation, silica fume can stand in for cement.

The compressive strength of concrete was found to be enhanced by adding 15% silica fume, according to experimental investigations. Concrete showed a progressive improvement in flexural strength of up to 15%. After 7 days and 28 days, the maximum flexural strength was measured to be 4.448 MPa and 6.72 MPa, respectively.

- Experiments showed that the compressive strength of concrete was increased by adding 15% silica fume. There was a 15% improvement in the tensile strength of concrete. Maximum compressive strengths of 29.33 MPa and 43.56 MPa, respectively, were documented after 7 and 28 days.
- The results indicate that silica fume could be a viable alternative to cement in concrete.
- The amount of silica fume utilised mostly determines the compressive strength. High-rises can make good use of high-performance concrete mixed with silica fume, since this helps to lower the initial peak strength during erection.

REFERENCES

- [1] Tak, Sudhansu, Priyanshu Gupta, Alok Kumar, A. Sofi, and Chin Mei Yun. "Effect of using silica fume as a partial replacement of cement in concrete." *Materials Today: Proceedings* (2023).
- [2] Hamada, Hussein M., Farid Abed, Herda Yati Binti Katman, Ali M. Humada, Mohammed S. Al Jawahery, Ali Majdi, Salim T. Yousif, and Blessen Skariah Thomas. "Effect of silica fume on the properties of sustainable cement concrete." *Journal of Materials Research and Technology* 24 (2023): 8887-8908.
- [3] Jayaraman, A., M. Vasudevan, R. Aravind, M. Keerthika, and J. Hari Prakash. "Optimization of partial replacement of cement by silica fume and rice husk ash for sustainable concrete." *Materials Today: Proceedings* (2023).
- [4] Madhu, B. E., K. Shanthi Sri, T. S. Charan, and Lovely Sabat. "Self-healing of cement mortar with partial replacement of cement with silica fume." *Materials Today: Proceedings* (2023).
- [5] Revathi, S., D. Suresh, and S. Thowfick Anwar. "Behaviour of concrete with PET bottles as fibers & silica fume as partial replacement of cement." *Materials Today: Proceedings* (2023).
- [6] Neeraja, P. G., Sujatha Unnikrishnan, and Alwyn Varghese. "A comprehensive review of partial replacement of cement in concrete." *Materials Today: Proceedings* (2023).
- [7] Ibrahim, K. I. M. (2021). Recycled waste glass powder as a partial replacement of cement in concrete containing silica fume and fly ash. *Case Studies in Construction Materials*, 15, e00630.

- [8] Campos, H. F., N. S. Klein, J. Marques Filho, and M. Bianchini. "Low-cement high-strength concrete with partial replacement of Portland cement with stone powder and silica fume designed by particle packing optimization." *Journal of Cleaner Production* 261 (2020): 121228.
- [9] Vijaya, Sathi Kranthi, Kalla Jagadeeswari, and Karri Srinivas. "Behaviour of M60 grade concrete by partial replacement of cement with fly ash, rice husk ash and silica fume." *Materials Today: Proceedings* 37 (2021): 2104-2108.
- [10] Vijaya, Sathi Kranthi, Kalla Jagadeeswari, and Karri Srinivas. "Behaviour of M60 grade concrete by partial replacement of cement with fly ash, rice husk ash and silica fume." *Materials Today: Proceedings* 37 (2021): 2104-2108.
- [11] Das, Kunal K., Eddie SS Lam, and Ho H. Tang. "Partial replacement of cement by ground granulated blast furnace slag and silica fume in two-stage concrete (preplaced aggregate concrete)." *Structural Concrete* 22 (2021): E466-E473.
- [12] Pashankar, Kausthibh A., A. S. Patil, and P. M. Thorat. "A literature review on study of silica fume as partial replacement of cement in concrete." *Int J Sci Res Eng Trends* 6 (2020): 275-278.
- [13] Hussian, Raid. "Use of Cement Kiln Dust and Silica Fume as partial replacement for cement in concrete." In *IOP Conference Series: Earth and Environmental Science*, vol. 877, no. 1, p. 012045. IOP Publishing, 2021.
- [14] Fallah-Valukolaee, Saber, Reza Mousavi, Arash Arjomandi, Mahdi Nematzadeh, and Mostafa Kazemi. "A comparative study of mechanical properties and life cycle assessment of high-strength concrete containing silica fume and nanosilica as a partial cement replacement." In *Structures*, vol. 46, pp. 838-851. Elsevier, 2022.
- [15] Fallah-Valukolaee, Saber, Reza Mousavi, Arash Arjomandi, Mahdi Nematzadeh, and Mostafa Kazemi. "A comparative study of mechanical properties and life cycle assessment of high-strength concrete containing silica fume and nanosilica as a partial cement replacement." In *Structures*, vol. 46, pp. 838-851. Elsevier, 2022.
- [16] Hamada, Hussein M., Farid Abed, Herda Yati Binti Katman, Ali M. Humada, Mohammed S. Al Jawahery, Ali Majdi, Salim T. Yousif, and Blessen Skariah Thomas. "Effect of silica fume on the properties of sustainable cement concrete." *Journal of Materials Research and Technology* 24 (2023): 8887-8908
- [17] Jayaraman, A., M. Vasudevan, R. Aravind, M. Keerthika, and J. Hari Prakash. "Optimization of partial replacement of cement by silica fume and rice husk ash for sustainable concrete." *Materials Today: Proceedings* (2023).
- [18] Nasr, MOHAMMED SALAH, T. Hussain, H. Kubba, and A. A. F. Shubbar. "Influence of using high volume fraction of silica fume on mechanical and durability properties of cement mortar." *Journal of Engineering Science and Technology* 15, no. 4 (2020): 2494-2506.